



ULTRACAM

Field Calibration Report

Camera: UltraCam Eagle M3
Serial: 431S61680X916102-f100
Manufacturer: Vexcel Imaging GmbH, A-8010 Graz,
Austria

Date of Calibration Flight: Apr-25-2019
Date of Report: May-14-2019
Camera Revision: Rev02.00
Version of Report: V01



Copyright © 2019 by Vexcel Imaging GmbH, Graz - Austria.

While every effort is made to ensure its correctness, Vexcel Imaging GmbH assumes no responsibility neither for errors and omissions which may occur in this document nor for damage caused by them.

Vexcel Imaging GmbH does not make a commitment to update the information and software discussed in this document.

All mentioned trademarks or registered trademarks are owned by their respective owners.

Printed in Austria at Vexcel Imaging GmbH. All rights reserved.

Bahia, Brasil 2013

Photo on page 1 courtesy of Hiparc Geotecnologia, Brasil

www.hiparc.com

UltraCam Lp, GSD25 cm, RGB



Calibration Procedure

The purpose of the Field Calibration is a verification of the camera status and calibration and consists of three major steps:

1. Test flight performed by customer
2. Processing of images and aerotriangulation (AT) by Vexcel Imaging GmbH
3. Analysis of AT results by Vexcel Imaging GmbH

Available Data

Test flight at customer's test site:

- Date of flight: Apr-25-2019
- Number of images: 188 (total)
- Flying heights: 1950 m (GSD 6.5 cm)
3630 m (GSD 13 cm)
- Number of images: 140 (GSD 6.5 cm)
48 (GSD 13 cm)
- Ground Control Points: 8 (16 were used as check points)
- Postprocessed GPS/IMU: available


Flight lines look very well done and show good overlap and image quality.

A-priori standard deviations settings


- Image measurements (x/y): 2,0 μm
- Ground Control Points (x/y/z): 50 mm / 50 mm / 70 mm
- GNSS Position (x/y, z): 60 mm / 60 mm
- IMU Pose (p/o, k): 3 mgon / 10 mgon



- Flight at 1950m (GSD 6.5 cm):

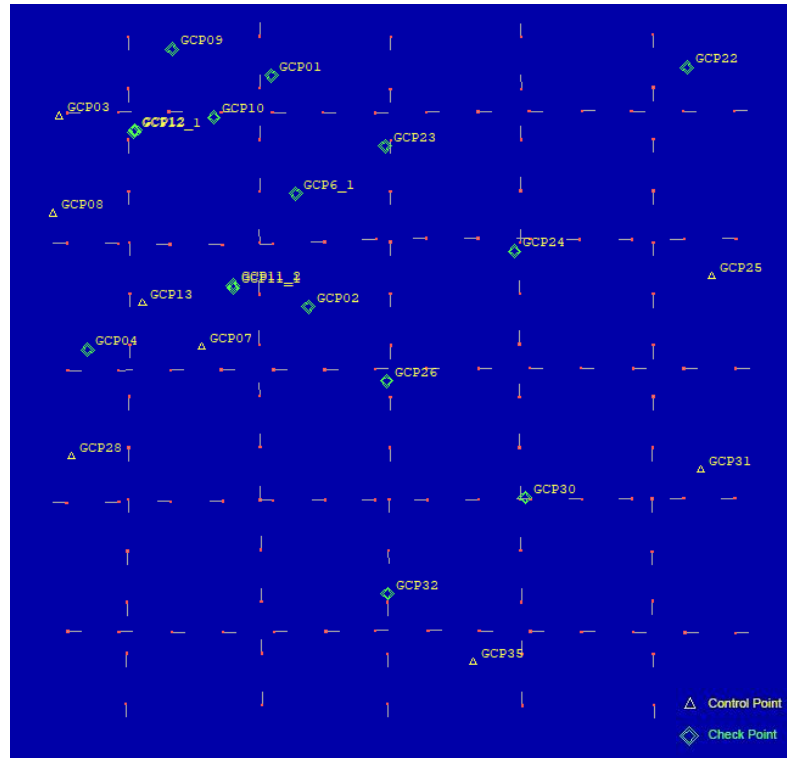

- Flight at 3630 m (GSD 13 cm):

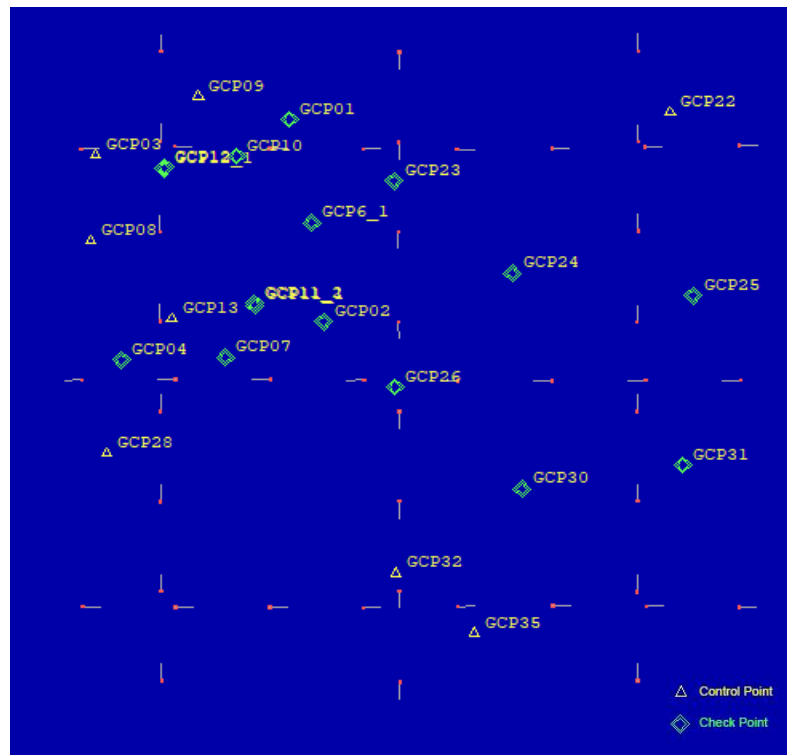



Results


of the Aerial Triangulation with calibration Rev 1.1 (labor calibration), as currently used by the customer.

The data was processed in UltraMap v4.4.7 by Vexcel Imaging GmbH (Process to Lvl02, Automated Tie Point Collection, Bundle Adjustment and Analysis).

The results of the Bundle Adjustment are shown in the table below.

	Flight 1950 m (GSD 6.5 cm)	Flight 3630m (GSD 13cm)
Sigma 0	0.97	0.98
Mean photo scale	1:16707	1:33367
RMSE of 8 check points X/Y/Z	43/46/57 mm	87/53/77 mm
RMSE of 16 control points X/Y/Z	52/22/40 mm	49/54/18 mm
Number of used Tiepoints	18847	7890
Refraction Correction	used	used
Earth curvature correction	used	used
Residuals of photo measurements (x', y') in photo space(unit μm):	RMS 0.8, 0.8 MAX 4.3, 4.0	RMS 0.8, 0.8 MAX 4.0, 4.8


The remaining residuals in the image of the camera are shown in the plots below.

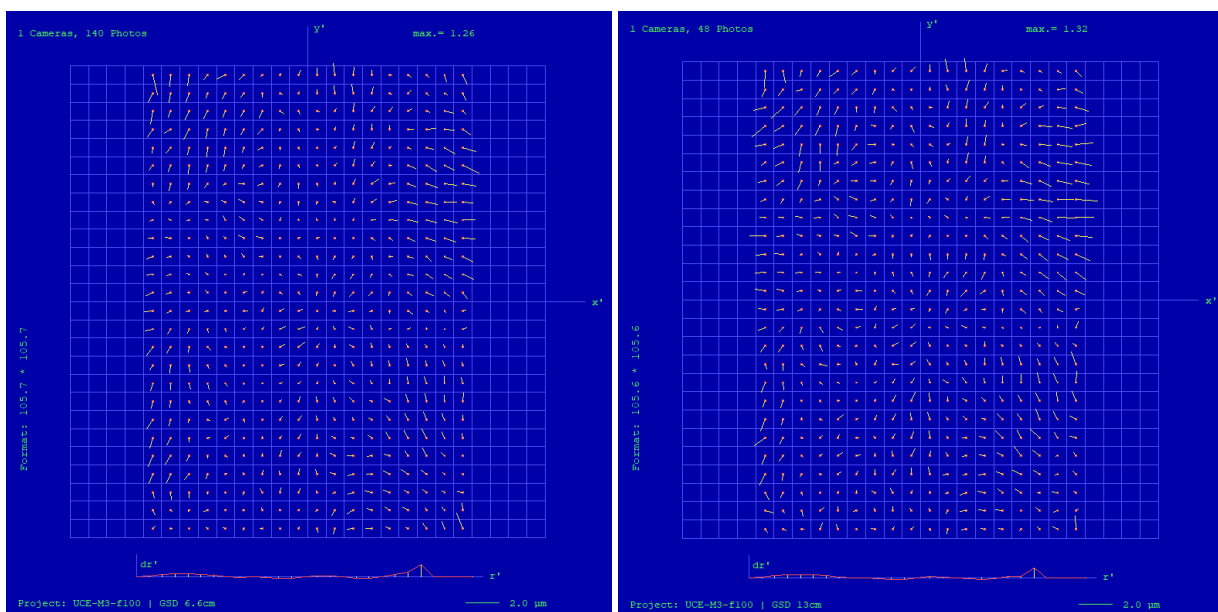



Geometric Adjustment

Radial distortion adjustment

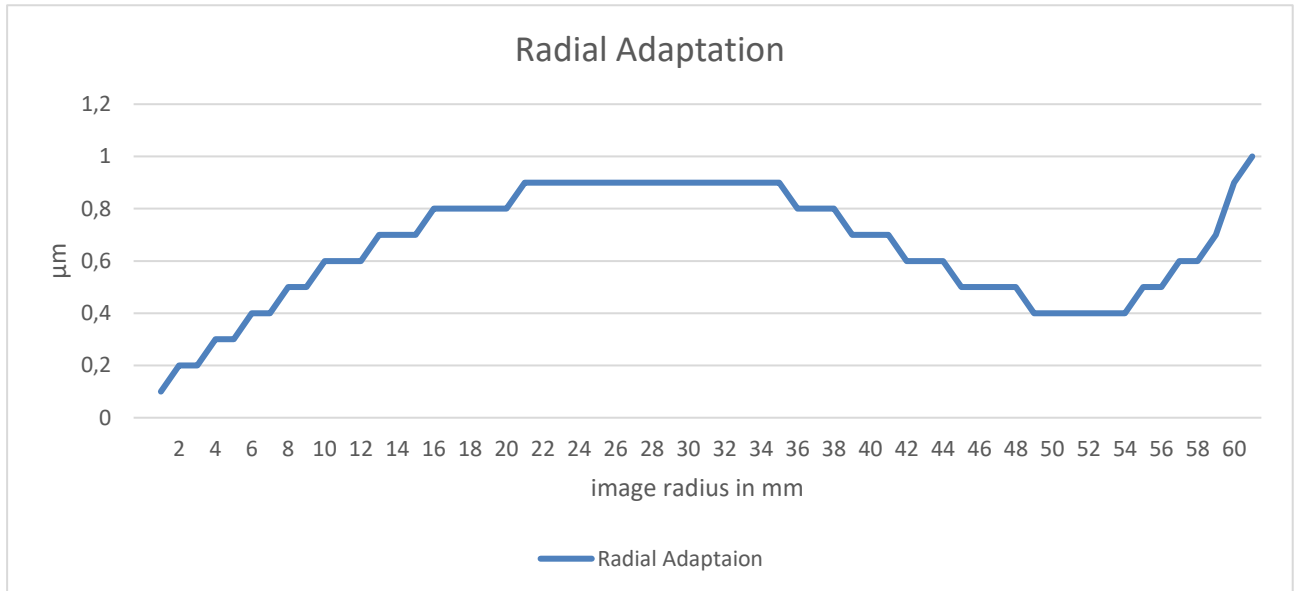

Focal length -0.0445 mm
Principal Point unchanged

Change in focal length is compensated via a scale parameter in the digital calibration dataset. The nominal focal length and principle point as given on pages 9 and 10 are valid for further photogrammetric processing.

Additional local corrections in the image plane are computed from both flight missions at 6.5 cm GSD and 13 cm GSD. The averaged correction values are applied to the camera calibration data set based on a 1 mm by 1 mm look up table. The magnitude of these corrections in x and y is illustrated in the figure below and shows the correction values at 117 even spaced image positions.



	-32	-24	-16	-8	0	8	16	24	32
48	-4.7 8.8	-3.3 8.5	-2.0 8.4	-0.8 8.1	0.2 7.7	1.3 7.3	2.7 7.6	3.8 8.0	5.0 8.5
40	-4.6 7.2	-3.3 7.1	-2.1 7.0	-0.9 6.9	0.2 6.6	1.3 6.3	2.5 6.5	3.6 6.7	4.7 7.0
32	-4.7 5.7	-3.5 5.7	-2.1 5.6	-1.0 5.6	0.2 5.4	1.4 5.2	2.4 5.3	3.5 5.5	4.5 5.7
24	-4.8 4.3	-3.6 4.2	-2.2 4.0	-1.2 4.1	0.1 4.0	1.4 3.9	2.3 4.0	3.4 4.2	4.4 4.4
16	-4.8 2.7	-3.7 2.7	-2.3 2.7	-1.5 2.9	0.0 3.0	1.5 3.1	2.2 3.2	3.5 3.4	4.7 3.5
8	-5.2 1.5	-4.0 1.4	-2.6 1.4	-1.6 1.5	0.0 1.6	1.6 1.6	2.6 1.7	3.9 1.7	5.1 1.8
0	-5.5 0.2	-4.2 0.1	-2.9 0.0	-1.6 0.0	0.0 0.0	1.6 0.0	3.0 0.0	4.3 0.1	5.5 0.1
-8	-5.7 -1.0	-4.5 -1.2	-3.1 -1.4	-1.6 -1.5	0.0 -1.6	1.6 -1.6	3.3 -1.6	4.7 -1.6	5.8 -1.6
-16	-5.8 -2.2	-4.7 -2.5	-3.3 -2.7	-1.5 -2.9	0.0 -3.0	1.5 -3.1	3.6 -3.2	4.9 -3.3	6.1 -3.3
-24	-6.1 -4.1	-4.7 -4.4	-3.1 -4.7	-1.7 -5.0	0.2 -5.1	2.1 -5.2	3.7 -5.2	5.4 -5.4	6.9 -5.6
-32	-6.1 -5.8	-4.6 -6.2	-3.1 -6.5	-1.5 -6.8	0.3 -6.8	2.1 -6.8	3.9 -7.0	5.5 -7.1	7.0 -7.2
-40	-6.0 -7.5	-4.5 -7.8	-3.0 -8.1	-1.4 -8.4	0.4 -8.4	2.1 -8.3	4.0 -8.5	5.7 -8.7	7.3 -8.8
-48	-6.2 -9.4	-4.6 -9.5	-3.0 -9.8	-1.2 -10.0	0.4 -9.9	2.1 -9.7	4.2 -10.1	5.9 -10.3	7.7 -10.7

Image correction in x and y given in μm at 117 image positions at an 8mm grid.



Results


of the Aerial Triangulation with calibration Rev 2.0 (field calibration), which will serve as the new calibration for the customer.

The data was processed in UltraMap v4.4.7 by Vexcel Imaging GmbH (Process to Lvl02, Automated Tie Point Collection, Bundle Adjustment and Analysis).

The results of the Bundle Adjustment are shown in the table below.

	Flight 1950 m (GSD 6.5 cm)	Flight 3630m (GSD 13 cm)
Sigma 0	0.74	0.94
Mean photo scale	1:16710	1:33373
RMSE of 16 check points X/Y/Z	51/51/51 mm	63/52/74 mm
RMSE of 8 control points X/Y/Z	30/25/36 mm	50/46/34 mm
Number of used Tiepoints	18670	8017
Refraction Correction	used	used
Earth curvature correction	used	used
Residuals of photo measurements (x', y') in photo space:	RMS 0.6, 0.6 MAX 4.1, 3.5	RMS 0.8, 0.8 MAX 5.2, 5.7

The remaining residuals in the image of the camera are shown in the plots below.

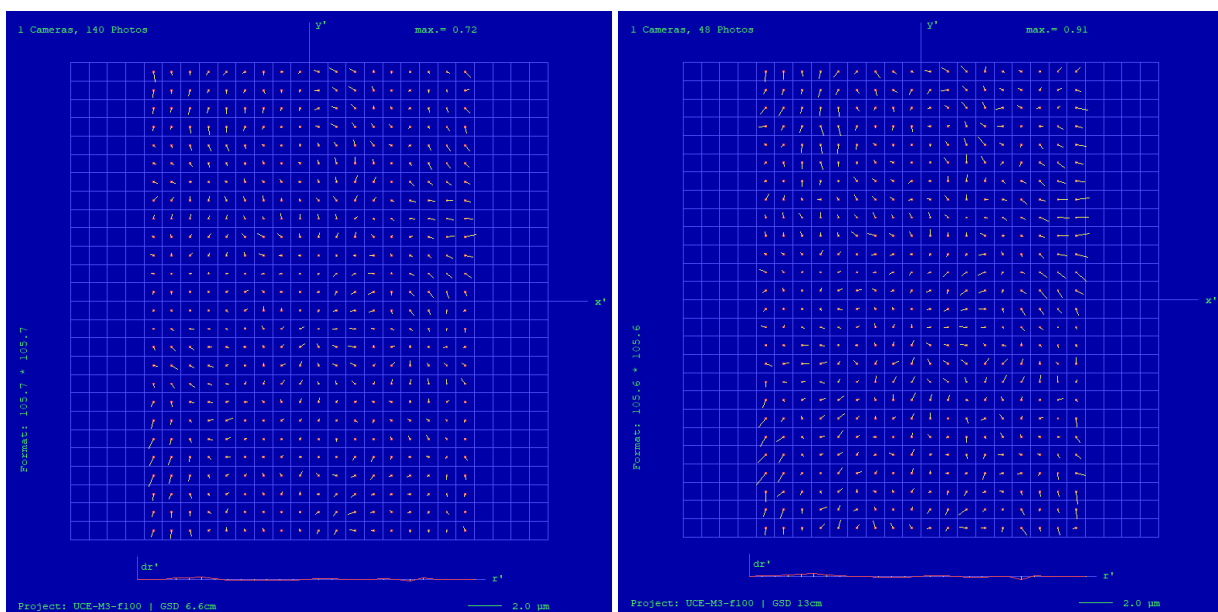



ULTRACAM

Geometric Specifications

Camera: UltraCam Eagle M3
Serial: 431S61680X916102-f100

Panchromatic Camera: ck = 100.500 mm
Multispectral Camera: ck = 100.500 mm

PPA Information: X: 0.000 mm
Y: 0.000 mm



Panchromatic Camera

Large Format Panchromatic Output Image

Image Format	long track cross track	68.016mm 105.840mm	17004pixel 26460pixel
Image Extent		(-34.008, -52.920)mm	(34.008, 52.920)mm
Pixel Size		4000 μm *4000μm	
Focal Length	ck	100.500mm	± 0.002mm
Principal Point (Level 2)	X_ppa	0.000mm	± 0.002mm
	Y_ppa	0.000mm	± 0.002mm
Lens Distortion	Remaining Distortion less than 0.002mm		

Multispectral Camera

Medium Format Multispectral Output Image (Upscaled to panchromatic image format)

Image Format	long track cross track	68.016mm 105.840mm	5668 pixel 8820 pixel
Image Extent		(-34.008, -52.920)mm	(34.008, 52.920)mm
Pixel Size		12.000μm*12.000μm	
Focal Length	ck	100.500mm	± 0.002mm
Principal Point (Level 2)	X_ppa	0.000mm	± 0.002mm
	Y_ppa	0.000mm	± 0.002mm
Lens Distortion	Remaining Distortion less than 0.002mm		



Conclusion

The tables and plots above show acceptable results for the processing with new the camera calibration. The calibration was verified with two datasets of the same test area acquired at different altitudes. The remaining distortions in the image are within an acceptable range.

This equipment is operating within specification as defined by Vexcel Imaging GmbH.

A handwritten signature in purple ink, appearing to read 'Michael Gruber'.

Dr. Michael Gruber
Chief Scientist, Photogrammetry
Vexcel Imaging GmbH

A handwritten signature in blue ink, appearing to read 'Marc Muick'.

Marc Muick MSc.
Application Specialist
Vexcel Imaging GmbH